

Performance Evaluation of the Maximum Achievable Bit Rate of a Next Generation TWDM Passive Optical Network

F.A .Ajiboduand B.A.OJO

Electrical Engineering Department, The Federal Polytechnic, Ilaro, Ogun State, Nigeria

ABSTRACT: Optic fiber is a medium used in communication to propagate light through a glass (waveguide). New technology which is data (internet) dependent, requires high speed of communication such as high definition (HD-TV). The present bit rate of the next generation optical network must be optimized at shorter fiber length in order to allow users to connect at higher data bit rate, in developing nations most educational campus fiber links are less than 10km, optimizing at this fiber length will allow user to connect at higher bit rate. In this paper a model was developed to investigate the maximum bit rate that a fiber link can carry at shorter distance than specified by the ITU-T standard. The model used OptiSystem simulator for a range of 10 km distance commonly found on campus fiber links in Nigeria. Two common next generation models were developed for time wave division multiplexing (TWDM) The result showed that more bit rate can be achieved at shorter fiber link with acceptable bit error rate (BER) of 10^{-9} .

Keywords: Bit rate, Bit Error Rate, Passive optic network, Simulator, Capacity, TWDM.

I. INTRODUCTION

The rise in data consumption by subscribers of both fixed and mobile broadband drives the standard to move in order to meet with this challenge. The next generation access network (NGaccess) will provide a very high data rates over long distance to be able to cope with the growing demand for high capacity broadband network. This effort was initiated by The Full Service Access Network (FSAN) and the ITU-T/IEEE. They first, The next generation PON stage 1 (NGPON1), which supports a capacity of 10 Gbit/s Upstream and downstream, which is now standardized by ITU-T as XGPON [1]. In 2011 FSAN initiated the next Generation stage 2 (NGPON2) which will enable a capacity beyond 10 Gbit/s [7]. Among the requirements is higher capability up to or greater than 40Gbit/s and a 40 km reach with 1: 64 split ratio and at least 1Gbit/s access rate per optical network unit (ONU) [7]. This is aimed at an aggregate capacity of not less than 40Gb/s. The optical access network will accommodate all kinds of information (voice, data, video, triple play multimedia 3-D) to be transported uniformly using packet based transport switching media [5].

Present trend shows that future video service, such as high definition television (HDTV) will require higher data rate and guaranteed bandwidth and the next generation access network must be such that it can meet up this requirement or demand. To this end the ITU-T/FSAN [6] have been working on how the next generation access network must be able to handle the convergence of voice, data and video which will suggest higher data rate and capacity [1]. The main objective of an optical access network is to provide access to the user (customer). This type of connection is commonly referred to as Fiber to the Premises (FTTP) or FTTH. That is, a fiber link from the central office (CO) provides service to multiple users or customer using transmitter(s) over a single fiber link, that provides downstream and upstream for each user connected to the link (this link is shared by all the users). This type of infrastructure used is referred to as passive optical network (PON), which uses a point to point or multipoint architecture and there are no active or electrical powered element between the central office (CO) and subscriber location as the name implies, hence, lower power required [5].

A passive optical network is the most suitable to satisfy this demand for high capacity, speed, and lower cost. Hence it is not surprising that Next Generation access standardization is in this direction. Currently, time division multiplexing (TDM-PON) are dominant or largely deployed such as Gigabyte PON (G-PON), ethernet PON (E-PON) in many part of the world [6] but in this system the bandwidth is shared among users in the system. Today the present demand drives the need for higher data rate. Telecommunication interest groups such IEEE/ITU-T and FSAN have proposed next generation PON (NGPON) [6]. The next generation PON is divided into two as earlier mentioned NGPON1 and NGPON2.

II. NEXT GENERATION PON STAGE 2

The standard requirement as stated in ITU-T recommendations G.989.1 and G.989.2 [6] respectively are:

- ✓ Ability to provide 128 Gb/s up to 500Gb/s;
- ✓ Support from 256 up to 1024 ONU's user per feeder fiber;
- ✓ Support up to 20 to 40 km extended passive reach option for working path;
- ✓ Low energy consumption;
- ✓ Low capital and operational cost [4]
- ✓ Coexistence with existing technology.

III. PASSIVE OPTICAL NETWORK SYSTEM

Passive optical network(PON) allows the sharing of a single fiber link(feeder fiber) between many users. It provides a link without an active or electrically powered component, which in effect reduces installation cost of the fiber link and by extension reduces ongoing operation and maintenance cost [5]. PON operates by using a single or multiple wavelengths to carry downstream and upstream data and voice traffic, as well as video broadcasting traffic on a single strand of fiber [2].

IV. PON ARCHITECTURES

The key elements of the architecture as shown in Fig. 1 are the optical line terminal (OLT) sometimes called PON head-end and commonly found in the central office. The optical network unit (ONU) commonly found at the subscriber premises and in between is the optical distribution network (ODN) (this is made up of fiber and optical power splitters) [7].

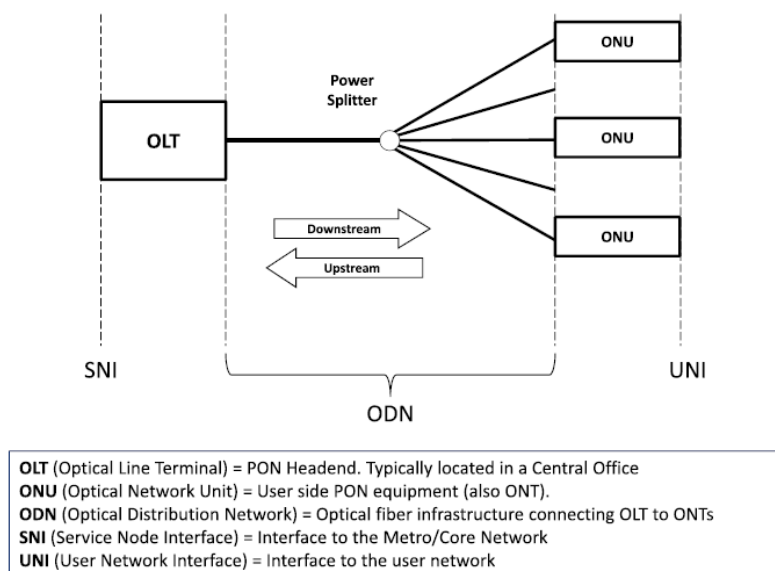


Figure 1: PON Architecture [7]

The optical splitter divides the incoming input optical signal from the feeder fiber between a number of output fiber links or customers. This is in the downstream direction. In the upstream direction, it combines all the input flow from the customer premises or fiber link into a single optical signal over the feeder fiber link towards the central office direction[7]. The number of fiber link supported by an OLT port is the maximum splitting ratio and is limited by the power budget considerations. The structure of the optical distribution network(ODN) and the class of optics that are deployed determines the value of the maximum splitting ratio[7]. For instance EPON and GPON specifications include nominal power budgets for each specific class deployed, which indicates the admissible power loss in the ODN. This in turn will limit the maximum power splitting and/or the maximum allowable distance from an ONU to the OLT [3]. The Splitter introduces a splitting loss of $3n$ dB where n is the number of splits.

Two most likely candidates to see widespread future deployments are: Time Division Multiplexing and Wave Division Multiplexing PON. In this paper, Time wavelength division multiplexing (TWDM-PON)

V. SIMULATION SETUP OF A TWDM-PON

This model will be used to demonstrate the performance of 40Gb/s TWDM-PON under varying lengths to investigate its performance characteristic at acceptable bit error rate of 10^{-9} based on the ITU-T G.989 recommendation of 40Gb/s downstream and upstream bandwidth, using the wavelength range of 1596nm - 1603nm in the L-band. It will also be used to determine the maximum bit rate at a distance not less than 10 km within the acceptable BER. Comparison of both models' simulated results and arriving at a conclusion and summary also suggesting anticipated future work that can done on the paper. The experiment is setup as shown in Fig. 2 using OptiSystem 13 [5]. The laser source is made up of four CW laser having wavelength range between 1596 to 1603nm [8], that is in frequency equivalent 187.5, 187.6, 187.7, and 187.8 respectively separated by 0.1THz or 10GHz. These are then multiplexed by a WDM multiplexer. The multiplexed signal is then modulated by a Mach-Zehnder (MZ) modulator to avoid chirp. That is, external modulation is carried out before being transmitted over a feeder fiber with an attenuation of 0.2dB/km. The signal is applied to a power splitter with attenuation of 14dB before being distributed to each respective ONU. At each ONU as can be seen in Fig. 2, a tunable filter is used to select the wavelength of each ONU to be detected by the receiver.

At the OLT, the PRBS Generator generates pseudo random binary sequence according to different operation modes. The order is 7 (that is 2^7) making the sequence length 128, the generated data is applied to the laser bias input via NRZ (non-return-to-zero) pulse generator, the NRZ pulse generator generates coded signal in the form of electrical pulses and its output is connected to the electrical input of MZ modulator to drive the MZM. The continuous wave (CW) laser emits a continuous laser output, and its optical signal output is connected to the optical input of MZ modulator. The MZ modulator provides external modulation which is based on the principle of interferometry. The MZ modulator has extinction ratio of 30dB and k factor equals to -1; which mean an ideal intensity modulator with zero chirp. The optical signal is then modulated by data stream from PRBS and fed into an optical fiber feeder. The simulation parameters are as provided in Table 1.

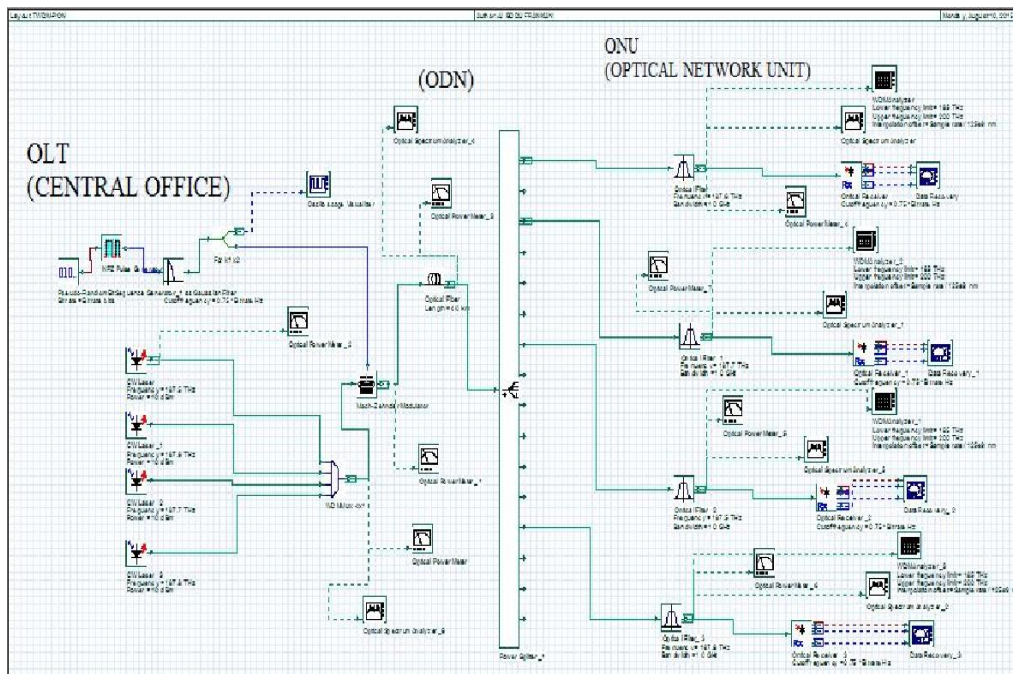


Figure 2: TWDM setup

Table 1: Simulation Parameters

Parameter	Values
Modulator	MZM external modulator
Datarate per wavelength	10Gb/s
Fiber attenuation	0.2 dB/km
Fiber type	SMF fiber
Distance	20 – 80 km
Number of wavelength	4
Splitter loss (1:16 split ratio)	14dB
MZM loss	5dB
Wavelength spacing	10GHz

The bit rate was increased from 10 Gb/s per wavelength in incremental order adjusting the length (reducing) to give an acceptable bit error rate not less than 10^{-9} . This procedure was used to determine the maximum bit rate that TWDM system can support with an acceptable limit of not less than 10 km.

VI. RESULTS AND DISCUSSION

In evaluating the performance of the TWDM-PON model, BER and eye diagram signal measurement was obtained. The BER was measured at the receiver using a data recovery monitor at the ONU measuring each wavelength after tuning the filter to the desired wavelength. Each wavelength carries data at 10Gb/s. The optical spectra for the four wavelength are shown in Fig. 3.

The optical spectrum of the downstream signal showing the four wavelengths 1596.34, 1598.04, 1597.19, 1598.89nm represented in frequency as 187.5THz, 187.6THz, 187.7 THz and 187.8THz respectively. The wavelength measured at each ONU are display below in Fig. 4 and Fig. 5 shows the 10GHz band spectrum of each wavelength.

The result shows that the maximum bit rate that can be supported by TWDM-PON system is 52Gb/s which meets the minimum requirement of 40Gb/s bit rate specified by ITU-T 989.2.

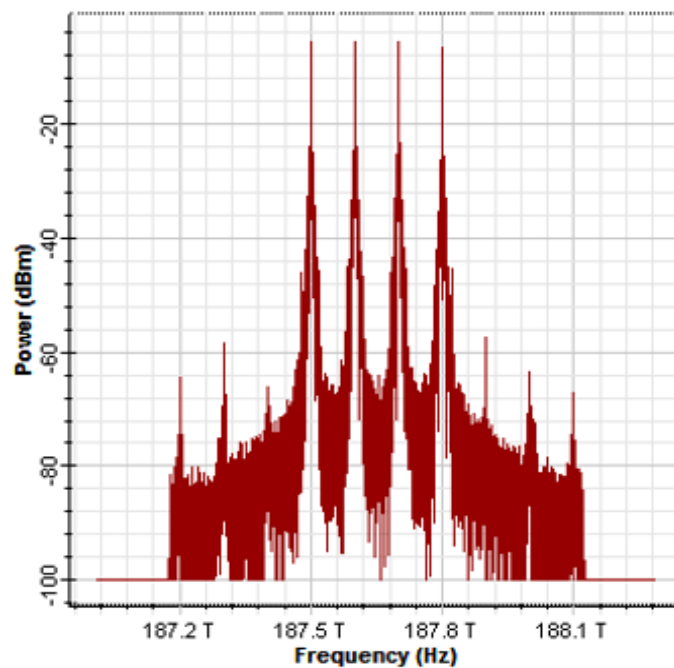


Figure 3: Optical spectrum of downstream signal

Table 2: Measured Bit rate, Fiber length and Aggregate bit rate of TWDM-PON system

Length (km)	Bit rate (Gb/s)	Aggregate Bit rate (Gb/s)
10	13	52
12	13	52
14	13	52
16	12	48
18	12	48
20	12	48
24	12	48
26	12	48
28	11	44
30	11	44
32	11	44
34	11	44
36	11	44
38	11	44
40	10	40
50	10	40

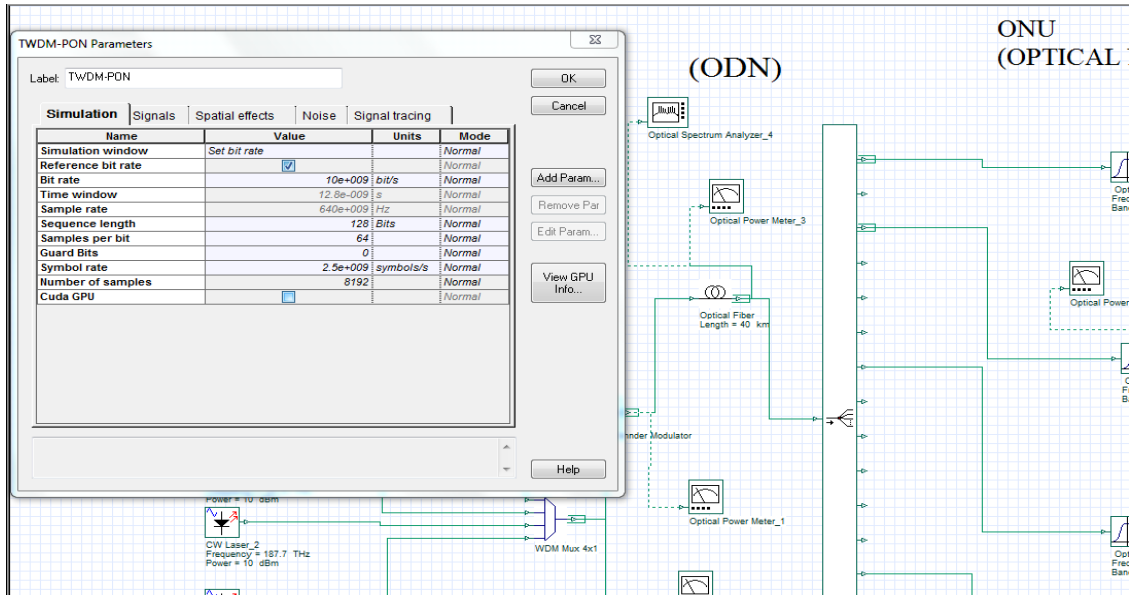


Figure 4: Experimental setup to determine maximum bit rate of TWDM-PON system model.

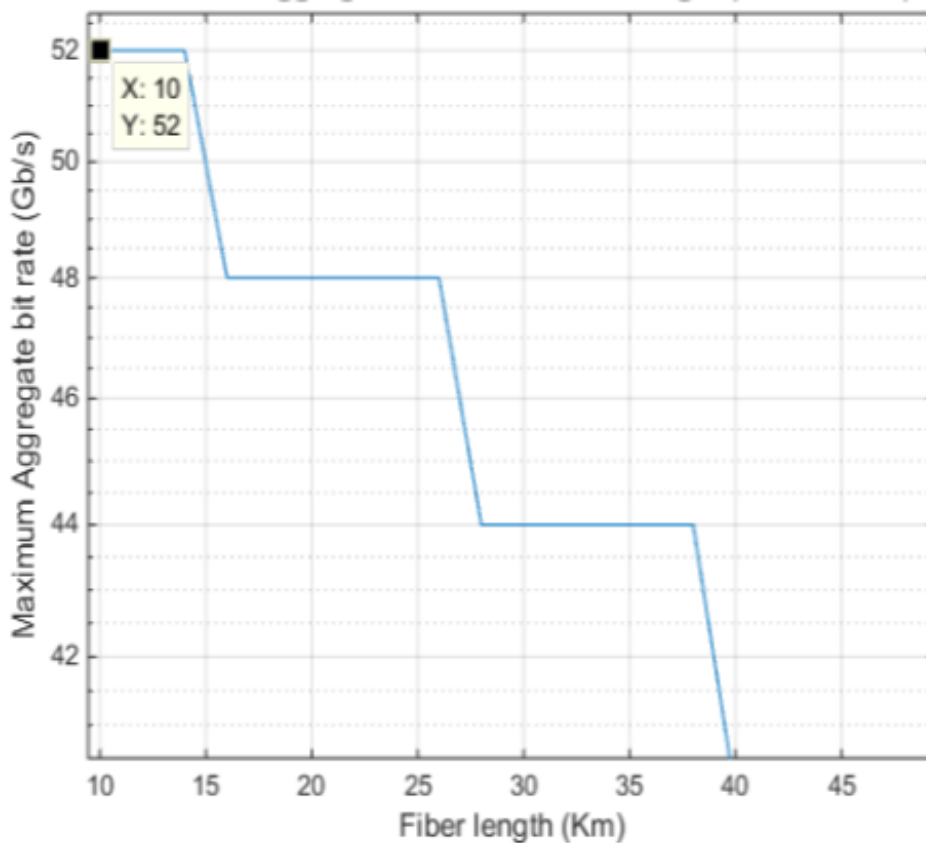


Figure 5: Plot of aggregate bit rate Versus Length

It was determined further in this experimental setup the maximum bit rate that can be supported by increasing the bit rate and reducing the distance to achieve a minimum of 10^{-9} BER. At each instance of increase in bit rate the length is reduced to accommodate the increase until a minimum of 10 km (which is still acceptable) is achieved. Table 2 shows the result obtained. It can be deduced from Fig. 3 and Table 3 that the maximum bit rate that can be supported by the XGPON model is 27.5Gb/s hence it does not meet up the minimum requirement for NGPON stage 2 of 40Gb/s minimum bit rate.

VII. CONCLUSIONS

Fig. 5 shows that the maximum bit rate that can be supported by this TWDM model is 52Gb/s at 10 km of fiber length. For practical applications this will support large volume of data when real time application is required. The results suggest that the model can be used over specified shorter distance to optimize the data bit rate, which by extension will improve data delivery over the fiber link.

ACKNOWLEDGEMENT

I will like to acknowledge Optiwave Inc. the developer of Optisystem Simulator.

REFERENCES

- [1] S Bindhaiq,.A Supa'at,.N Zulkifli,.A. B Mohammad,.R Shaddad,.M.A Elmagzoub,.A. Faisal, Recent development on time and wavelength-division multiplexed passive optical network (TWDM-PON) for next-generation passive optical network stage 2 (NG-PON2)", *Optical Switching and Networking* 2015, 1553–6.
- [2] F. J. Effenberger, "10G PON - Explained," *Optical Fiber Communication Conference, Optical Fiber Communication Conference, San Diego, California United States, 2010*, doi:10.1364/OFC.2010.OWX4for-NGPON2-XLG-PON-V2X.pdf.
- [3] E. Harstead, D. V. Veen, & P. Vetter, "Technologies for NGPON2: Why I think 40G TDM PON (XLG-PON) is the clear winner," in *Proc. Opt. Fiber Comm.Conf./Nat. Fiber Opt. Eng. Conf. Workshop, 2012*. Retrieved from: http://www.ofcnfoec/osa.ofc/media/default/2012/presentations/6-harsted_Technologies.
- [4] R.Heron, & A. Pesovic, "TWDM-PON taken fiber to new wavelength", 2014. Retrieved from <http://insight.nokia.com/twdm-pon-taking-fiber-new-wavelengths>
- [5] ITU-T, "Gigabit-capable passive optical networks (G-PON)," *ITU-T G.984.x specifications*, 2008.
- [6] ITU-T, "10-Gigabit-capable passive optical network (XG-PON) systems, ITU-T G.987.x specification, 2012.
- [7] D. Nessel "NG-PON2 technology and standards" *Journal of Light wave Technology*, 33(5), 1st March 2015, pp. 1136 - 1143. DOI: 10.1109/JLT.2015.2389115.
- [8] J. Zhang, N. Ansari, "On analyzing the capacity of WDM PONs," *Proc. IEEE GLOBECOM* 2009.